
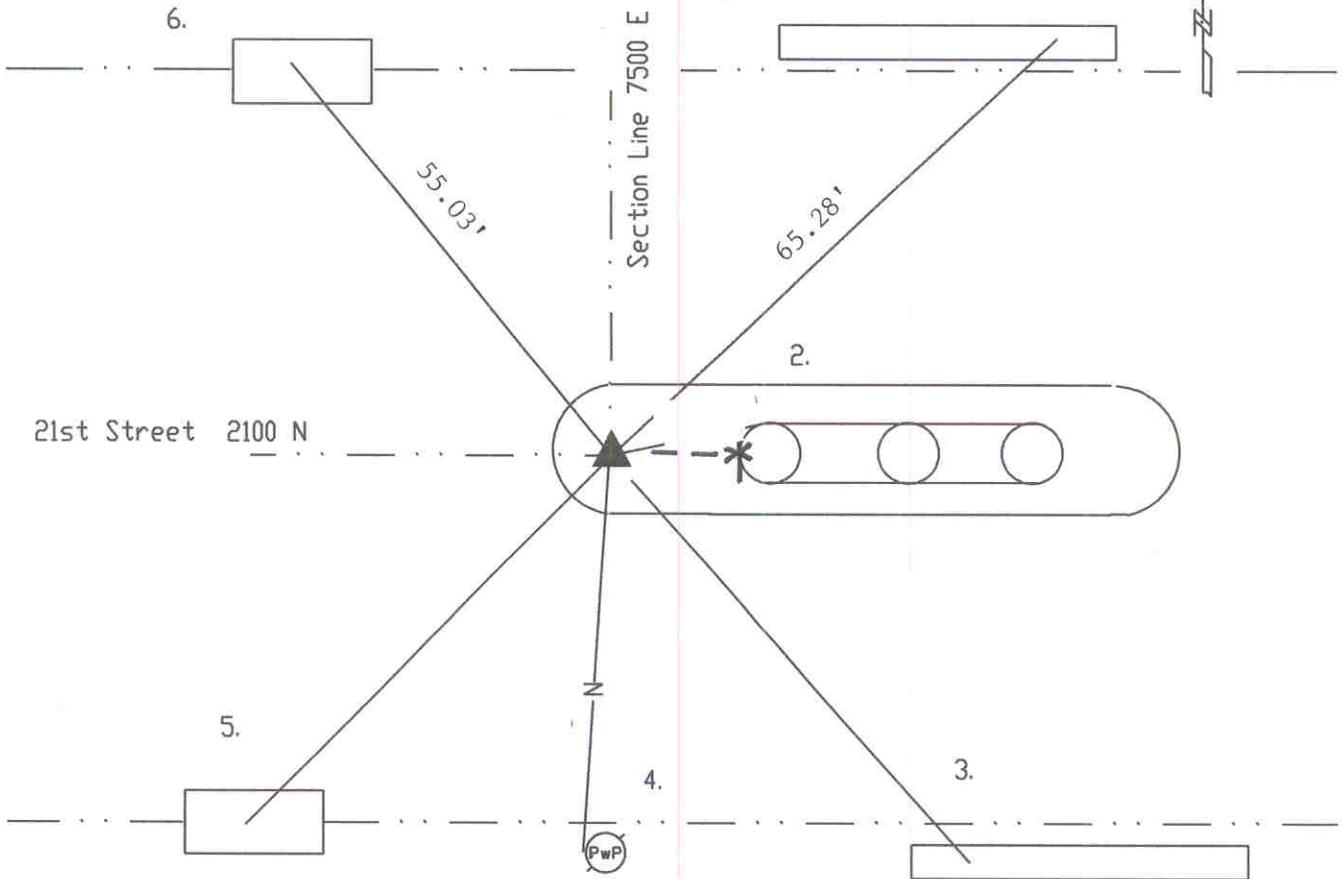


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 36 TOWNSHIP 16 RANGE 4
 DATE: -10-3-97-- 1-11-04
 PARTY CHIEF: --Kiste-- Wilcoxon
 CREW: _____
 TYPE OF MARKER: Harrison (in curb)
 METHOD OF ESTABLISHMENT: County: 10-12-92

IN. S.P.C. E ZONE, NAD 83
 NAME: 16043602
 N: 504981.0120(m)
 E: 68367.9350(m)

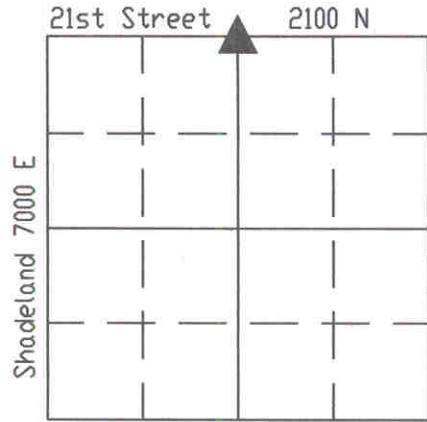

Original post set in 1820 by Hendricks with witnesses: 18" beech N 83 E 24 links, 16" dogwood S 86 W 20 links per Marion County Atlas pg. 11. Hosbrook 5/14&16/1882 called rock with both stumps showing. 40" red oak N 6 E 67 links per Warren Township Legal Survey Book, pg. 4. Monroe 5-7-58 called 1" pipe over stone. Mulryan of Schneider 5-31-74 called a brass plug in concrete. Fortner 9-13-74 called brass plug in concrete. Wilcoxon 2-25-76 called brass plug. Wilcoxon 4-8-91 called brass plug in concrete 10-14-92 Harrison set per construction project.

HC643602

REF.	DISTANCE	DESCRIPTION
1.	65.28'	'x' E-end concrete wall
2.	14.51'	'x' N concrete pillar
3.	53.71'	'x' W-end concrete wall
4.	96.59'	Mag. nail w/bw E PwP no# 6"up
5.	59.69'	'x' top curb inlet
6.	55.03'	'x' top curb inlet